

DuraPass Technical Information



DuraPass side hinged personnel door

Doors are available in standard and custom sizes

Standard Overall Frame Widths Standard Overall Frame Heights

890mm	1865mm
990mm	2090mm
1110mm	2190mm
	2400mm


Any custom width from 790mm - 1140mm Any custom height from 1700mm - 2400mm




Terms and conditions apply to the warranty on DuraPass doors, please ask for full details.

Standard Colours: White, Black, Vandyke Brown, Anthracite Grey, Goosewing Grey, Olive Green, Juniper Green, Golden Oak and Rosewood.


Thresholds

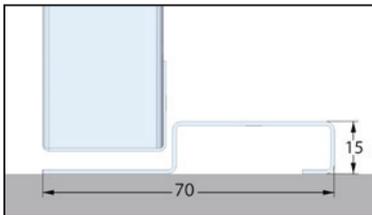

Standard open out 15mm low profile threshold

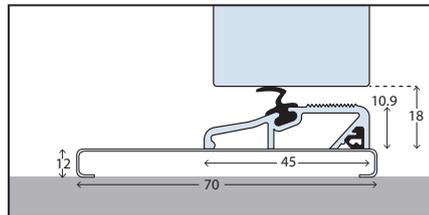


Standard inward opening threshold

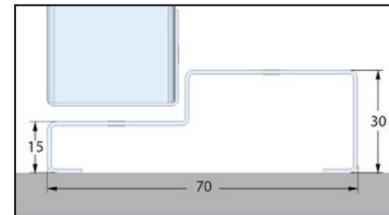

Optional 30mm open out threshold (must be specified if required)

Overall Frame Dimensions

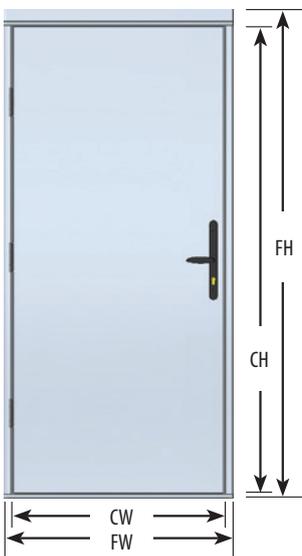

- FW Frame width
- CW Clear passage width = FW - 114mm
- FH Frame height
- CH Clear passage height = FH - 72mm For standard 15mm open out low profile threshold
- CH Clear passage height = FH - 80mm For standard open in threshold
- CH Clear passage height = FH - 87mm For optional 30mm threshold

To order specify:

- Ordering size:** No fitting clearance allowed. Garage Door Systems recommends allowing 15mm in width and 10mm in height when fitting between brickwork.
- Handing:** Hinged on the left or right as viewed from the outside.
- Opening:** Outward or inward as viewed from the outside.
- Threshold:** Standard 15mm low-profile threshold.

Doors are supplied with a protective film that must be removed within thirty days.

Example:

For a 1000mm x 2100mm structural opening order your door as 985mm x 2090mm. Please see Garage Door Systems Survey/Order form for full details diagrams and additional fitting options.

Fitting note: To minimise the ingress of rain run-off between the foot of the door leaf and the door threshold consideration must be given the floor surface to which the door is fitted ensuring that water is able to drain freely away. This particularly important on inward opening doors.

Floor rebate

To help assist water draining away effectively from the face of your door and prevent water ingress you must have a rebate (minimum 10mm) high behind the door threshold or where your door seal meets a level floor. If your floor is not rebated and not sloping away from the face of your door you will be susceptible to water ingress as water will not be able to drain away effectively.

